

APD 1650 M

è _ , - - ' _ " P s Mitsubishi

ÿ , % ' _ _ - " • ... - - " _ t , l P 732 % , % ' _ _ , - " • ... - - " _ t , l

• Θ - ... - " ' _ _ , % ' , " - - , ' _ " P s t £ > _ _ , - - ' _ " _ '

Manufacturer		Mitsubishi
Model		S12R-PTAA2
j - " % , , - " P s t - l - t • t " t , ' _ " P s t - l , t n t t % ' P s		1500 t - . / , , t . 1441,00 " ю ' . [1932,00HP]
h t " t ' _ t , _ ! , " , t - ... t -	L	49,000
è , - , _ _ ' ... , > t - • t _ _ / t l	, , .	170 X 180
ÿ ' _ • _ t P s % ' - ' , l		13.5:1
ь t , , t - " P s t £ _ t - t _ t ' £ (t - / , , t)	t - . / , , t .	1500
ë , " t % ' P s , - % " - (i .)	L	180,00
ь - F _ _ , t > " - ' - - % n _ _ ' ' , - " t % ' ,	L	317,00
AbsorbedAirDischargeReSourceKey.Text	, , 3 / , , t .	120,00
h _ t • " % " t - l % • t % t - t t % ' P s - t ' - " / t t - t _ _ - , - ' t _ _ - (, , 3 / , , t .)	, , 3 / , , t .	1800,00
ÿ _ _ • _ _ - ' " _ _ - - £ > " t • -	° C	318,00
ÿ " _ _ " ' ... , _ _ % " - l % , % ' _ _ , -		24 V d.c.
K - % > t - ' t • , - -	Load	• ... , 100%
	i / - % .	' - - - " ' ' u _ =
		317,00


• ÿ , • - " P s ' _ _ ... t - ' t _ _ -

j t _ _ " P s		ECO46-1S/4
r - % ' t ' -	Hz	50
j t n t t % ' P s	" ю б .	1500,00
Cos Θ		0,80
i t " , _ _ % ' - t < - '		3
ь - • ... l ' _ t , _ _ - " P s ' _ _ ... t - ' t _ _ - (ю)	ю	400/230

• K - ' , _ _ ... £ , - _ %

t ' " ... £ ' - l - " ... • • -	ю % " _ .	è " , t - (, , .)	ÿ , ... , t -	- £ % t ' - (, , .)	è , " t % ' P s ' t • " , - t t - t - - " -
APD 1650 M	13000,00	5000,00	2200,00	3100,00	2000,00
я ... " • • £ % " t ' " > t ,	ю % " _ .	è " , t - (, , .)	ÿ , ... , t -	- £ % t ' - (, , .)	è , " t % ' P s ' t • " , - t t - t - - " -
AK 99	18000	9000	2800	3300/4800	2200

• P 732 % , % ' _ _ , - " • ... - - " _ t , l - ÿ , % ' _ _ , - " • ... - - " _ t , l

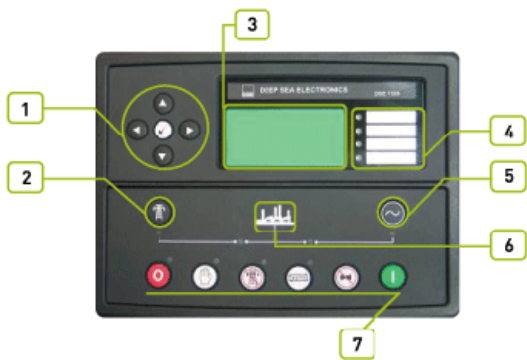

- 1 i t t • " , t - , - - ! , , , _ _ t %
- 2 i t t • " - • _ _ _ - t - - % _ ' ,
- 3 è - ' ^ , " , " ... t - t l , ! , < ... t - t ' - , % • " _ ' _
- 4 ÿ _ _ ' t - , t - t - l % , - t - " , ' - ! , l
- 5 i t t • " - - £ " % _ _ t , l _ _ t _ _ - ' t _ _ -
- 6 % _ _ ' t - , t - t £ ' , t - , " - ' t _ _
- 7 i t t • " , - £ - t _ _ - t • _ _ - ! , ,

APD 1650 M

è-, -- ' " Pts Mitsubishi

$\dot{y}, \frac{y}{y_0}, \frac{y}{y_0}' = -$
 $" \bullet \dots - - " = +, \ell$

- [illegible]

● € ' „... , ' _" Pts † € _ • ... , - ‡ ... €

[illegible]

● Һ•!! , \$\$\$£ _ \$%\$ - _ \$\$\$% ' .

[illegible]

• $\mathfrak{h}_{\dots}, -\mathfrak{t}_{\dots} - " \ell' - \dots \ell - ", - " " " , " " \ell' \mathfrak{t}_{\dots} -$

[illegible]


► Й>__"- ' - n , ' €

[illegible][illegible]

● Й' - +---... €

[illegible]

AK 99 - “± ‘ ”>

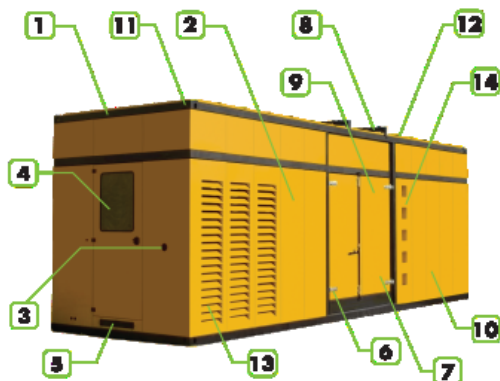

И '†--..._

[illegible]

● Й' - + - - ... ' + £ _ % _ • _ !! , < , “ - !! , ,

[illegible]

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the
- 5 generator set
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of
- 13 the canopy.
- 14 sound proofing materials

Ẁ, ..., ẏ-	𐌵 𐌶 𐌷	2800
è", Ț- (,, Ț.)	𐌸 𐌹 𐌺	9000
–£%Ț' - (,, Ț.)	𐌹 𐌺 𐌻	3300/4800
ë,, Ț% / Pts ' Ț•", –ȚȚ-Ț -- " -	L	2200